

Standards

Product Description

The Concealed Weep Hole discharges the water from external walls. For use in areas such as:

- At ground floor slab level.
- Within cavity tray systems.
- Over external lintels.

The Weep Vent is a multi-function product for discharging water from external walls and ventilating the cavity.

It can be used in **all the above and:**

- Where a cavity must be ventilated.

Features & Benefits

- Pre-formed to guarantee reliable water discharge.
- Less likely to become blocked by simply leaving the vertical joint open.
- Front grille prevents entry of large nest building insects into the cavity when using our full height weep vent.
- 4mm wide front aperture prevents large nest building insects entering the cavity when the concealed weepholes are used.
- Stainless steel Grade 304 2B, 0.7mm thick stainless steel as standard.
- Meets all relevant British standards.

Features & Benefits

- To work effectively the SafeSeal Weep Vents should be placed directly on top of the cavity tray system.
- The SafeSeal weep vents should be spaced at 900mm centres on a cavity tray run or at 450mm centres on a cavity tray run above windows and doors.
- Extra care should be taken to ensure the back of the weep vents/weep holes are not blocked by mortar droppings from above.



Weep Vent




L Shaped Weep Hole

For sales or technical assistance please call

01189 753 377 or email sales@dorseys.co.uk

Weep Vent

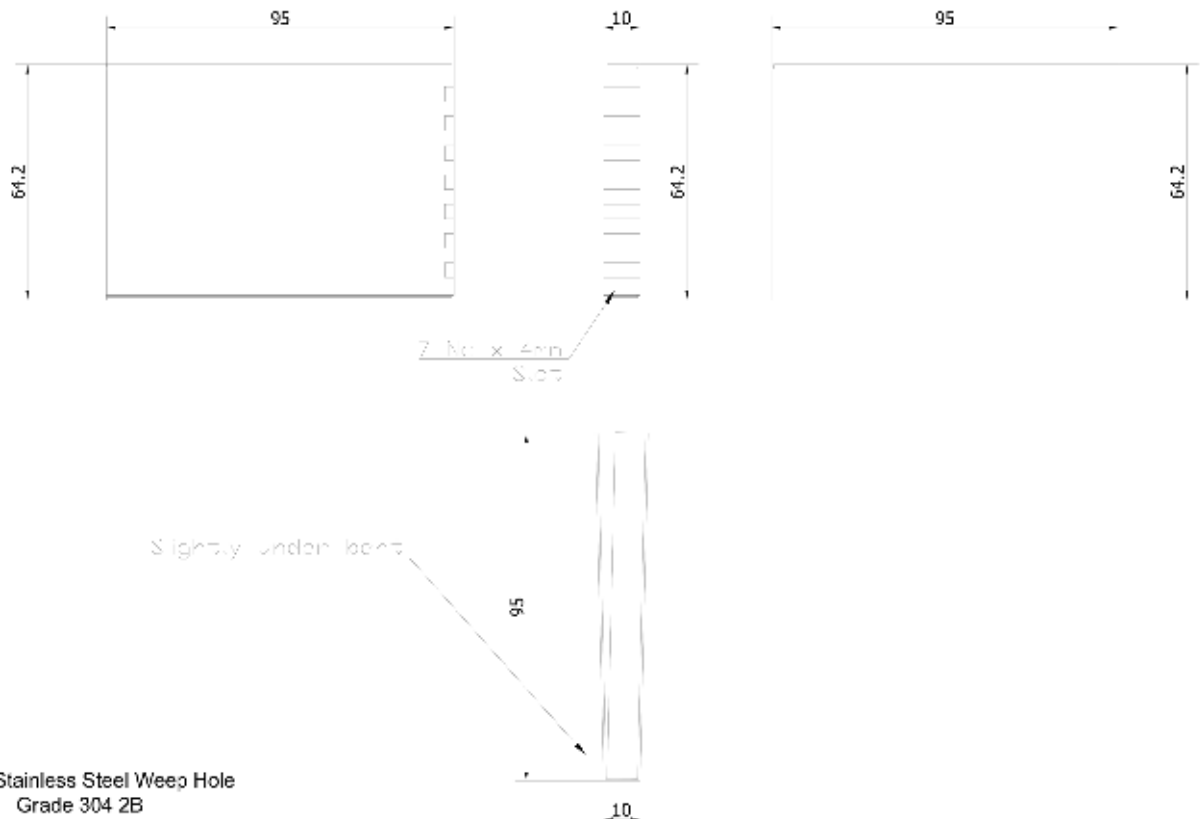


Weep Vent Specification

| Height | Width | Length | Colour |
|--------|-------|--------|-----------------|
| 64.2mm | 10mm | 95mm | Stainless Steel |

For sales or technical assistance please call

01189 753 377 or email sales@dorseys.co.uk

Concealed Weep Hole

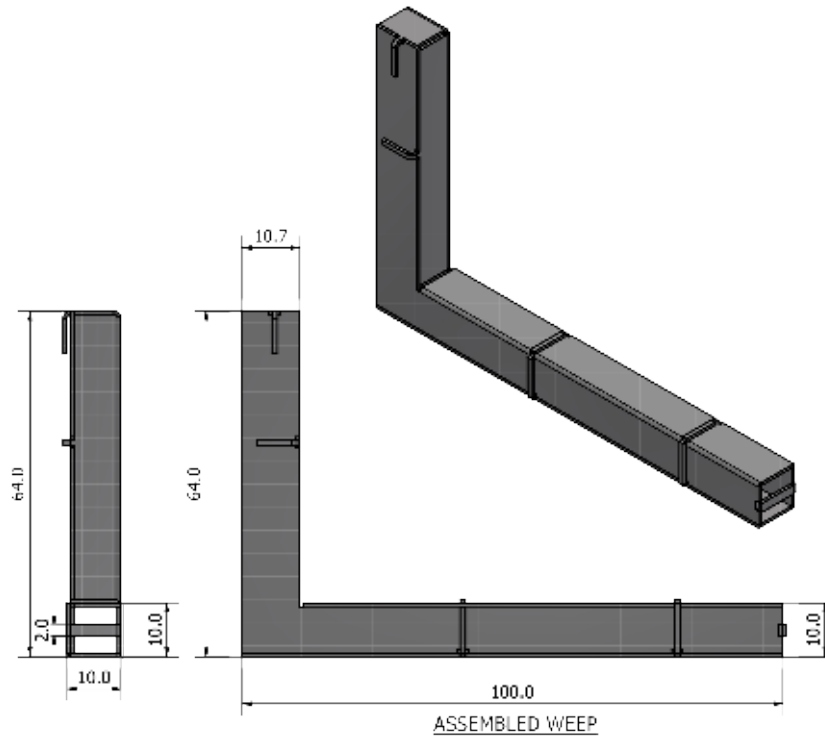

Concealed Weep Hole Specification

| Height | Width | Length | Colour |
|--------|-------|--------|-----------------|
| 64mm | 10mm | 100mm | Stainless Steel |

For sales or technical assistance please call

01189 753 377 or email sales@dorseys.co.uk